



1505 Cox Road  
Cocoa FL 32926  
Phone: 1-800-515-9983  
Fax: 321-631-1169

[WWW.KELTECWEAPONS.COM](http://WWW.KELTECWEAPONS.COM)



SAFETY, INSTRUCTION and PARTS MANUAL **KSG-NR**

 Warning: Read this manual carefully before loading or using the KSG™-NR.



**YES**  
**CORRECT**




**NO**  
**WRONG**



### KSG™-NR Specifications

Operating System	Pump Action
Capacity (Dual Magazines)	4+4+1 , 3" shells 5+5+1, 2.75" shells
Chamber	12-gauge 3.00" (76 mm)
Barrel Length	18.5" (470 mm)
Length of Pull	13.0" (330 mm)
Total Length	26.1" (663 mm)
Sight Rail	MIL-STD-1913 Picatinny Rail
Weight (unloaded)	6.8 lbs (3.1 Kg)
Light Lumens	420
Light Batteries	3 each: CR 123A Lithium 3volt



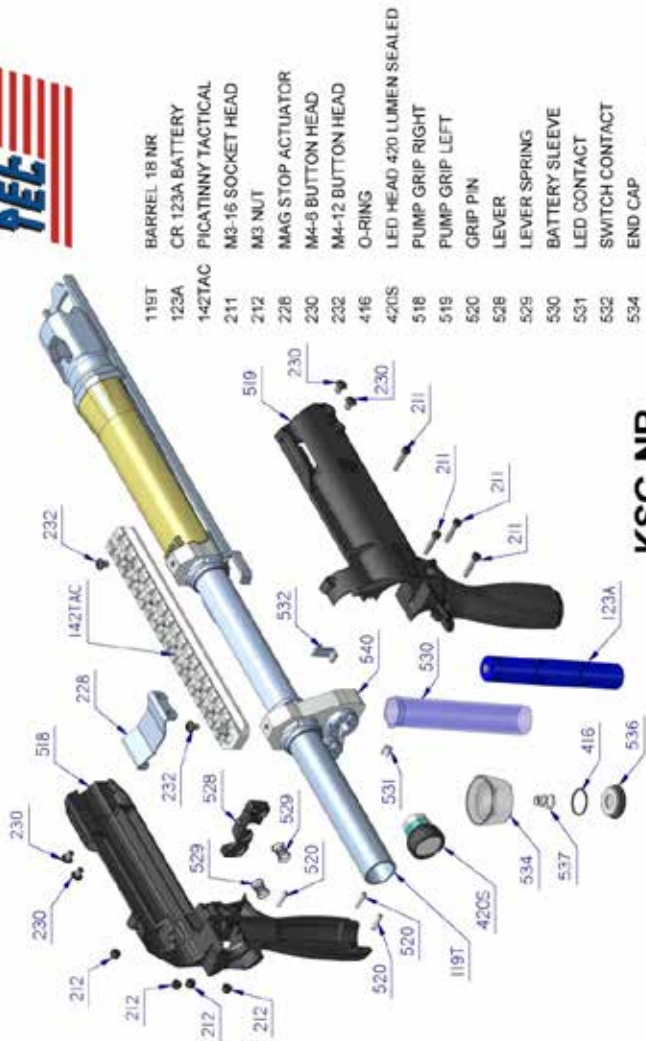

119T	BARREL 18 NR
123A	CR 123A BATTERY
142TAC	PICATINNY TACTICAL
211	M3-16 SOCKET HEAD
212	M3 NUT
228	MAG STOP ACTUATOR
230	M4-6 BUTTON HEAD
232	M4-12 BUTTON HEAD
416	O-RING
420S	LED HEAD 420 LUMEN SEALED
518	PUMP GRIP RIGHT
519	PUMP GRIP LEFT
520	GRIP PIN
528	LEVER
529	LEVER SPRING
530	BATTERY SLEEVE
531	LED CONTACT
532	SWITCH CONTACT
534	END CAP
536	BATTERY CAP
537	BATTERY COIL SPRING
540	MUZZLE FLATE TACTICAL

**KSG-NR**  
**Exclusive Parts**  
FOR ALL OTHER PARTS, SEE KSG MANUAL